


N2 W4 A 1,2m

AS-BLB.B



CE

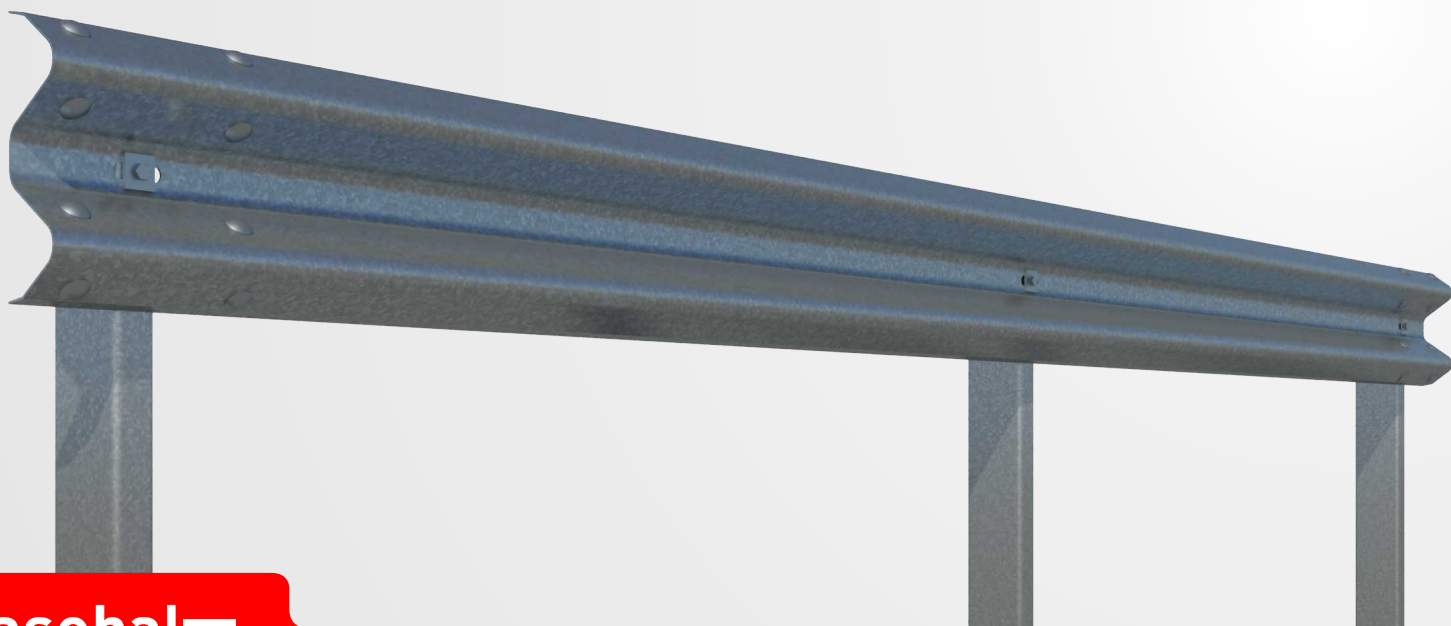

asebal

Vehicle Restraint System


Definition


Single metal barrier for lateral side. System formed by a double wave barrier and C posts 2 metres apart.

Performance parameters

| | | | | | | | |
|-------------------|-----------|-------------------|-----------|-----------------|----------|------------------------|-------------|
| Containment level | N2 | Working Width (W) | W4 | Impact Severity | A | Dynamic Deflection (D) | 1,2m |
|-------------------|-----------|-------------------|-----------|-----------------|----------|------------------------|-------------|

Profile

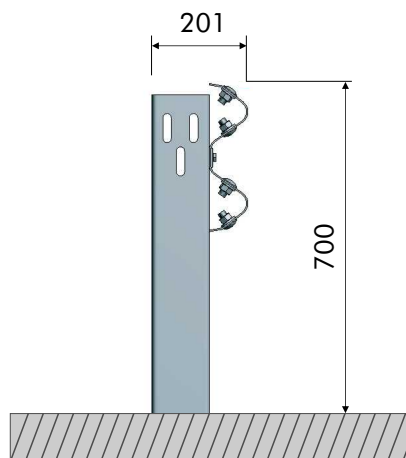

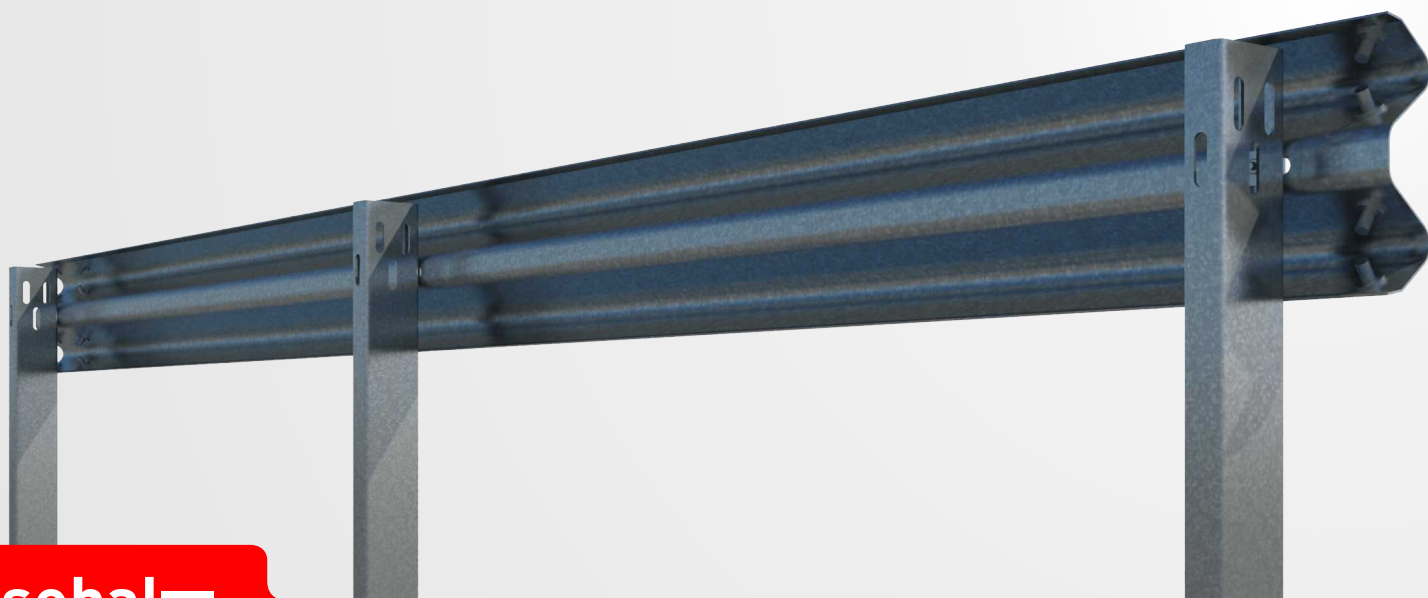

Components for sections of 4 m

| Item | Part | Uds |
|------|-----------------------------------|-----|
| 1 | Standard barrier of 4 m | 1 |
| 2 | C post-120 of 1500 mm | 2 |
| 3 | Reflector | 0,5 |
| 4 | Round head bolt M 16x30, with nut | 8 |
| 5 | Round head bolt M 10x40, with nut | 2 |
| 6 | M10 nut | 4 |
| 7 | Washer Ø17x 35x4 mm | 8 |
| 8 | Square washer 40x40x5 mm | 4 |

Fasteners

