


N2 W3 A 1,0_m

AS-BLB.C



CE

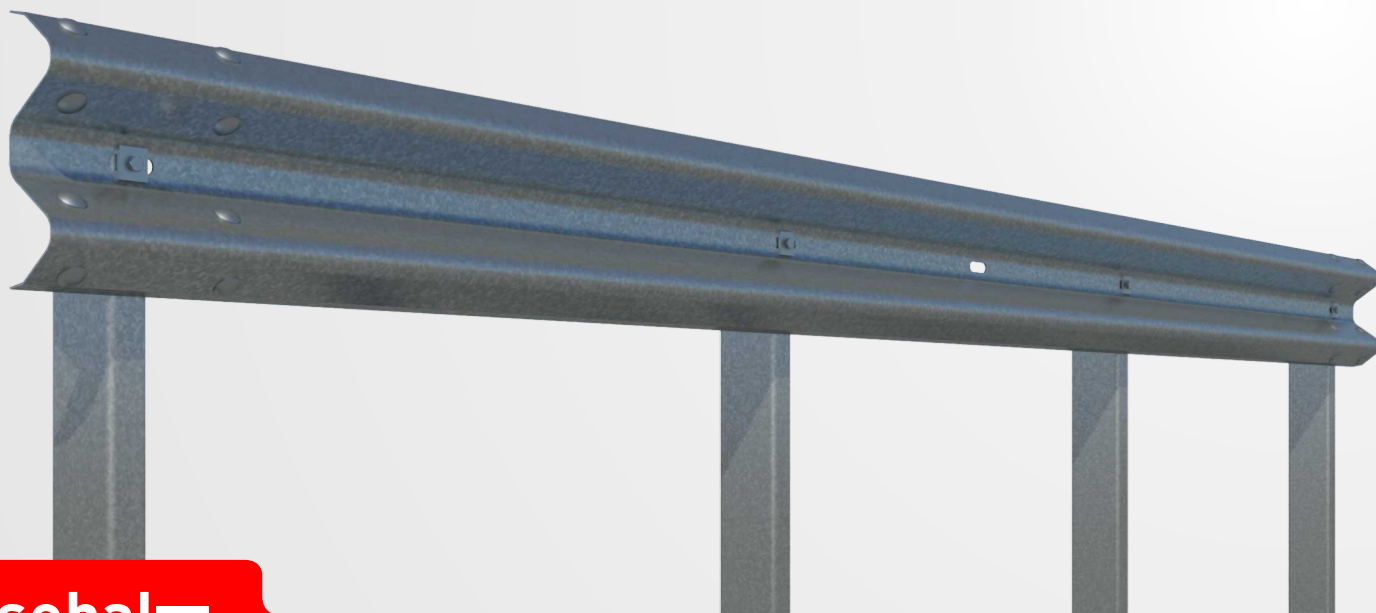

asebal

Vehicle Restraint System


Definition

Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 1,33 metres apart.

Performance parameters

Containment level	N2	Working Width (W)	W3	Impact Severity	A	Dynamic Deflection (D)	1,0_m
-------------------	-----------	-------------------	-----------	-----------------	----------	------------------------	------------------------

Profile

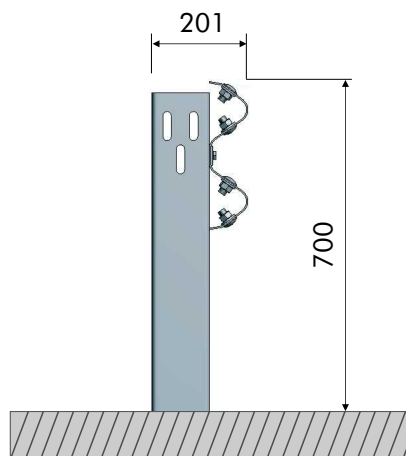



asebal

Vehicle Restraint System

Components for sections of 4 m

Item	Part	Uds
1	Standard barrier of 4 m (Perforated at intervals of 1,33 m.)	1
2	C post-120 of 1500 mm	3
3	Reflector	0,5
4	Round head bolt M16x30, with nut	8
5	Hexagon head cap bolt M10x40	3
6	M10 nut	6
7	Washer Ø17x 35x4 mm	8
8	Square washer 40x40x5 mm	6

Fasteners

