


H2 W5 A 1,5m VI5

AS-BL2.B(C1)  CE

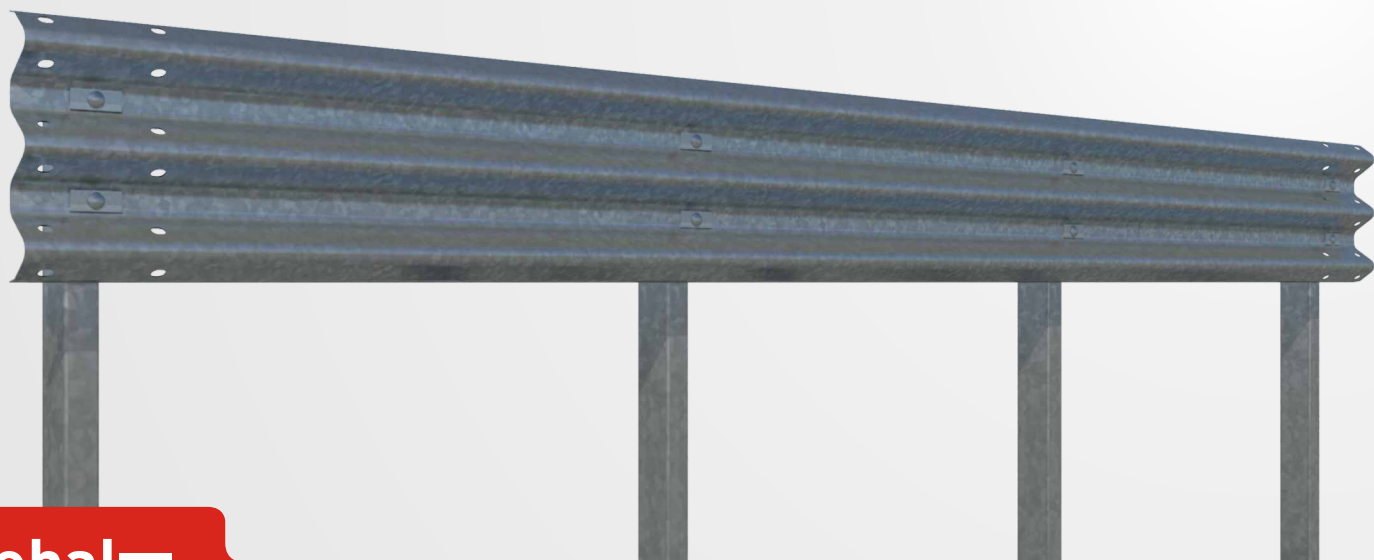

asebal 

Vehicle Restraint System


Definition

Single metal barrier for lateral side. System formed by a triple wave barrier, spacer and C posts 1.5 metres apart.

Performance parameters

Containment level	H2	Working Width (W)	W5	Impact Severity	A	Dynamic Deflection (D)	1,5m
Intrusion (I)	VI5						


Profile

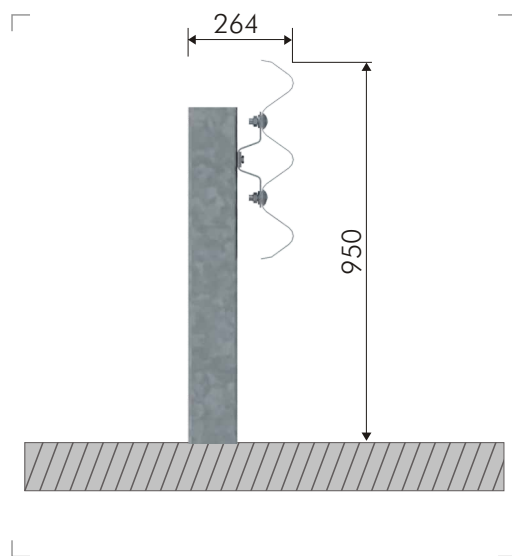

H2 W5 A 1,5m VI5

AS-BL2.B(C1)

CE

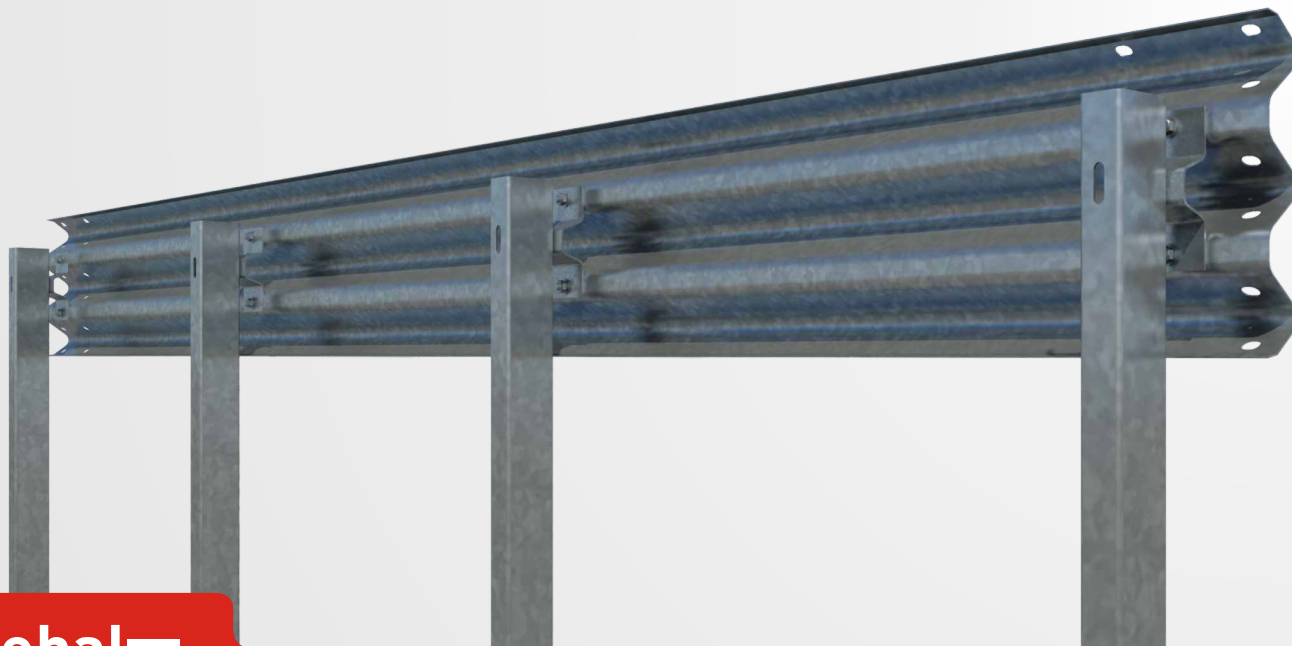

asebal

Vehicle Restraint System

Components for sections of 4.5 m

Item	Part	Units
1	Triple wave barrier of 4,500 m	1
2	C post 123x70x18x4 mm of 1,900 mm	3
3	Trapezoidal spacer for triple wave	3
4	Round head bolt M16x40	6
5	Round head bolt M16x30	12
6	Bolt DIN 933 M10x40	3
7	Rectangular washer 100x40x5 mm	6
8	Square washer 40x40x5 mm	6
9	Washer Ø17x 35x4 mm	18
10	Nut M16	18
11	Nut M10	3
12	Reflector	1

Fasteners

