


H2 W5 A 1,5m VI5

AS-BL2.B  CE

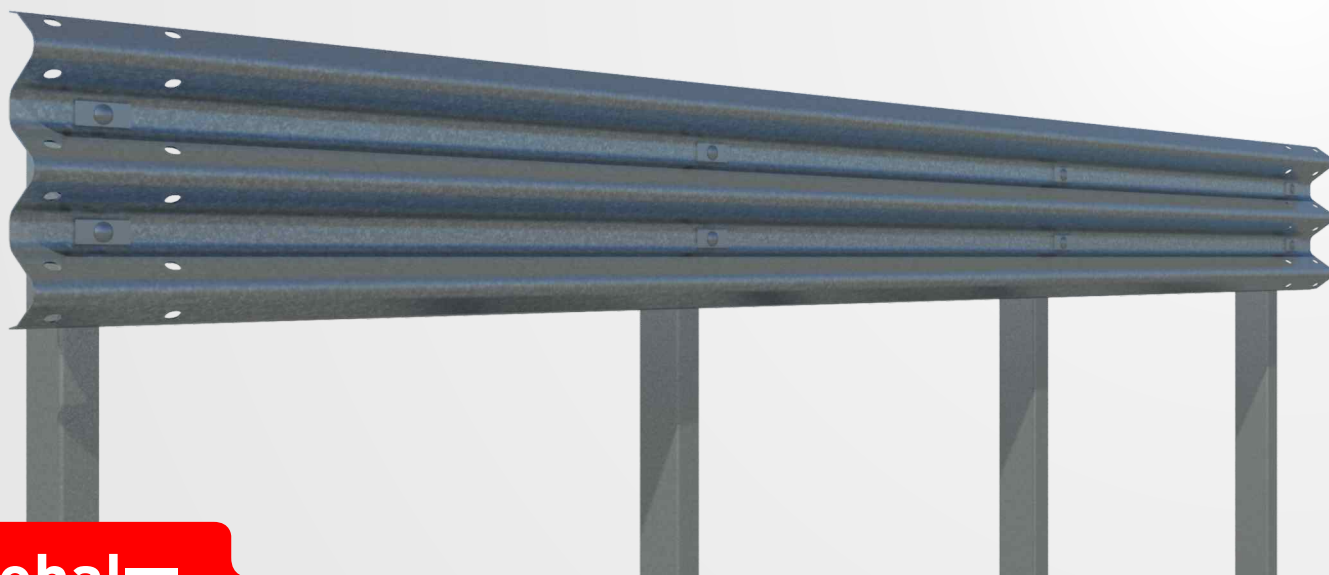

asebal 

Vehicle Restraint System


Definition

Single metal barrier for lateral side. System formed by a triple wave barrier, spacer and U posts 1.5 metres apart.

Performance parameters


| | | | | | | | |
|-------------------|------------|-------------------|-----------|-----------------|----------|------------------------|-------------|
| Containment level | H2 | Working Width (W) | W5 | Impact Severity | A | Dynamic Deflection (D) | 1,5m |
| Intrusion (I) | VI5 | | | | | | |

Profile

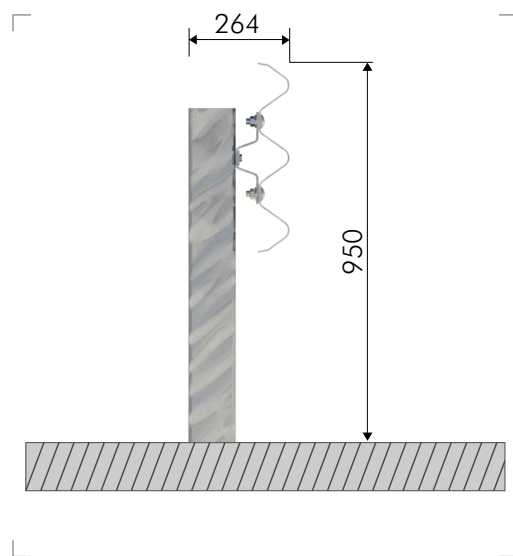

H2 W5 A 1,5m VI5

AS-BL2.B

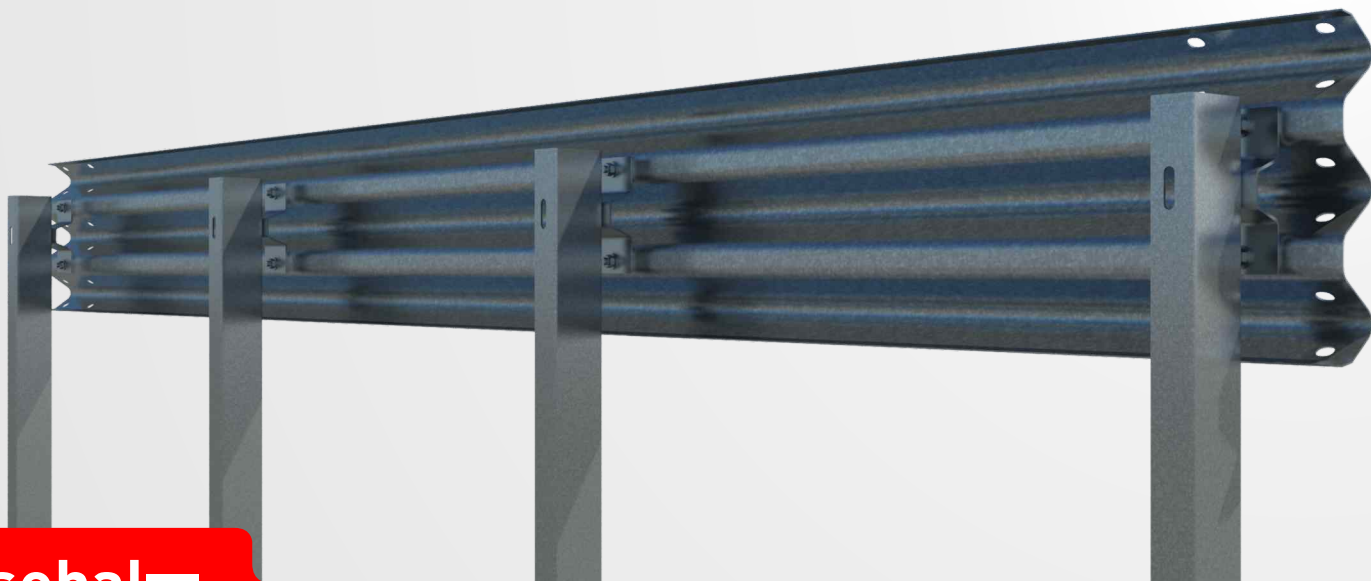

asebal

Vehicle Restraint System

Components for sections of 4.5 m

| Item | Part | Units |
|------|------------------------------------|-------|
| 1 | Triple wave barrier of 4,500 m | 1 |
| 2 | U post 123x70x4 mm of 1,900 mm | 3 |
| 3 | Trapezoidal spacer for triple wave | 3 |
| 4 | Round head bolt M16x40 | 6 |
| 5 | Round head bolt M16x30 | 12 |
| 6 | Bolt DIN 933 M10x40 | 3 |
| 7 | Rectangular washer 100x40x5 mm | 6 |
| 8 | Square washer 40x40x5 mm | 6 |
| 9 | Washer Ø17x 35x4 mm | 18 |
| 10 | Nut M16 | 18 |
| 11 | Nut M10 | 3 |
| 12 | Reflector | 1 |

Fasteners

