


Definition

Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 4 metres apart.

Performance parameters




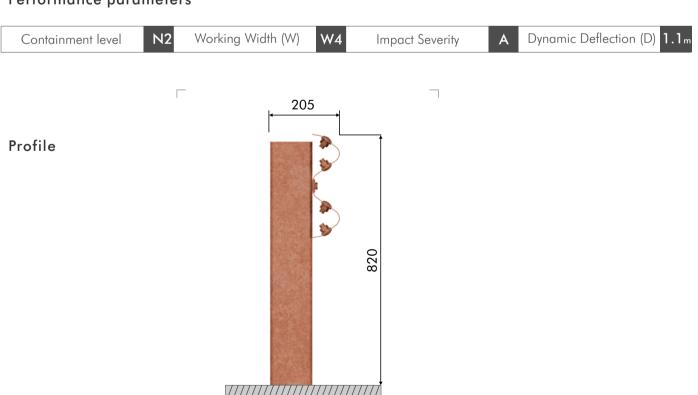

Components for sections of 4 m

Item	Part	Uds
1	Standard barrier of 4 m (Perforated at intervals of 1.33 m)	1
2	C post-125x75x20x5 1,600 mm	1
		_
3	Washer∅17x35x4 mm	8
4	Hexagon nut M16 class 5	8
		_
5	Round head bolt M16x30	8
		_
6	Washer 40x40x5 mm Ø11 for M10	1
	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
7	Hexagon head cap bolt DIN 933 M10x40	I
0	Washan 100, 40, 5 and (X11 for M10	
8	Washer 100x40x5 mm Ø11 for M10	
9	Nut DIN 934 M10	1
9	NOI DIN 704 MIO	

Fasteners



Detail of joint between barriers