

N2 W2 A 0,6m

AS-BLB.H (C1)



**asebal**

Vehicle Restraint System


### Definition

Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 1,33 metres apart.

### Performance parameters

Containment level	<b>N2</b>	Working Width (W)	<b>W2</b>	Impact Severity	<b>A</b>	Dynamic Deflection (D)	<b>0,6m</b>
-------------------	-----------	-------------------	-----------	-----------------	----------	------------------------	-------------

### Profile

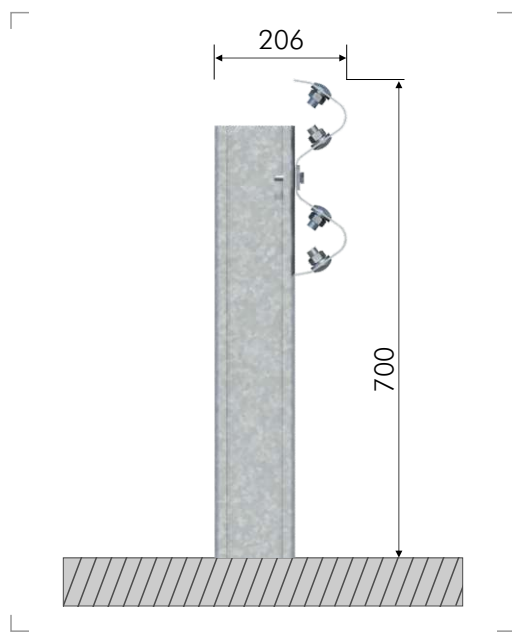



**asebal** 

Vehicle Restraint System

### Components for sections of 8 m

Ítem	Parts	Uds
1	Standard barrier of 4 m (Perforated at intervals of 1,33 m, 2 mm thick)	1
2	C post-125x70x18x4 de 1,400 mm	3
3	Washer Ø17 x35x4 mm	8
4	Hexagon nut M16	8
5	Round head bolt M16x30	8
6	Hexagon head cap bolt DIN 933 M10x40 quality 8.8	3
7	Washer 40x40x5 mm Ø11 for M10	3
8	Nut DIN 934 M10 quality 8	3
9	Washer 100x40x5 with hole Ø11 for M10	3
10	Reflector	0,5

### Fasteners

