


N2 W4 A 1,1_m

AS-BLB.H (C4) 



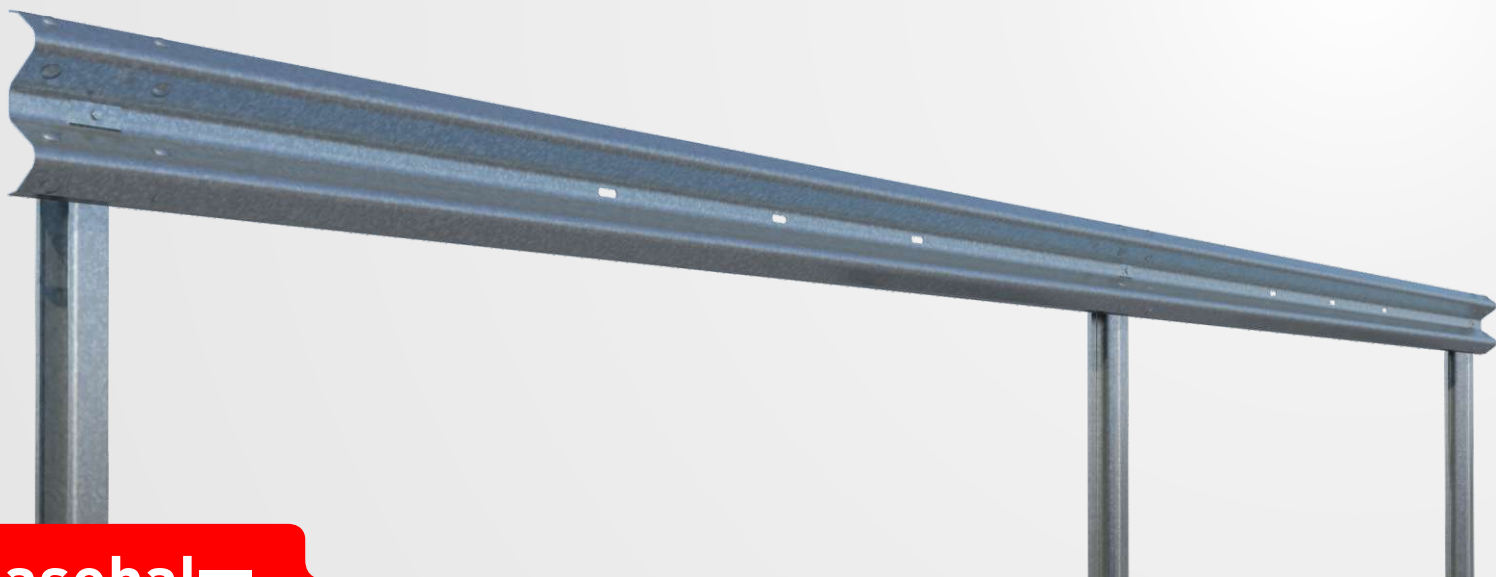

asebal 

Vehicle Restraint System


Definition

Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 4 metres apart.

Performance parameters


Containment level	N2	Working Width (W)	W4	Impact Severity	A	Dynamic Deflection (D)	1,1_m
-------------------	-----------	-------------------	-----------	-----------------	----------	------------------------	------------------------

Profile

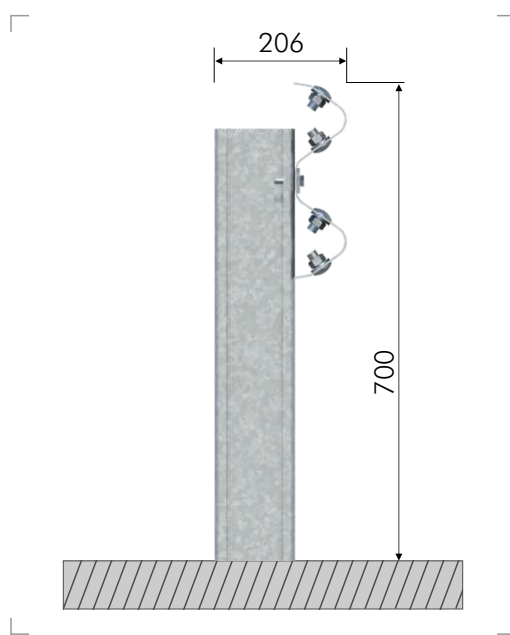

N2 W4 A 1,1_m

AS-BLB.H (C4)

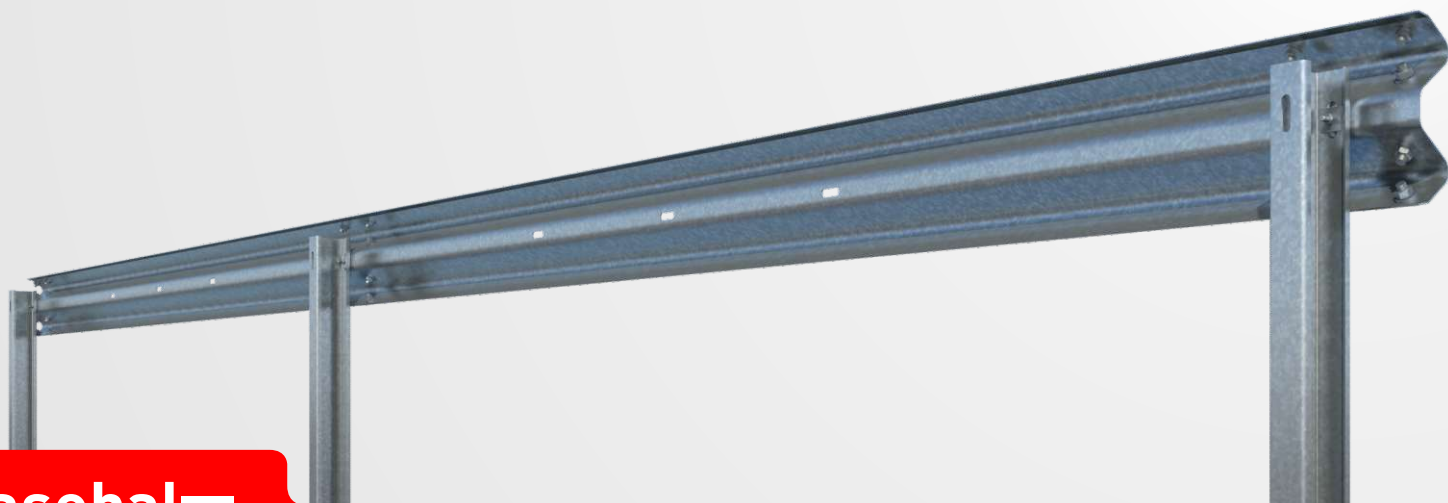

asebal

Vehicle Restraint System

Components for sections of 4 m

Ítem	Parts	Uds
1	Standard barrier of 4 m (Perforated at intervals of 1,33 m, 2 mm thick)	1
2	C post-125x70x18x4 de 1,400 mm	1
3	Washer Ø17 x35x4 mm	8
4	Hexagon nut M16	8
5	Round head bolt M16x30	8
6	Hexagon head cap bolt DIN 933 M10x40 quality 8.8	1
7	Washer 40x40x5 mm Ø11 for M10	1
8	Nut DIN 934 M10 quality 8	1
9	Washer 100x40x5 with hole Ø11 for M10	1
10	Reflector	0,5

Fasteners

