


N2 W4 A 1,2<sub>m</sub>

AS-BLB.H (C6)  

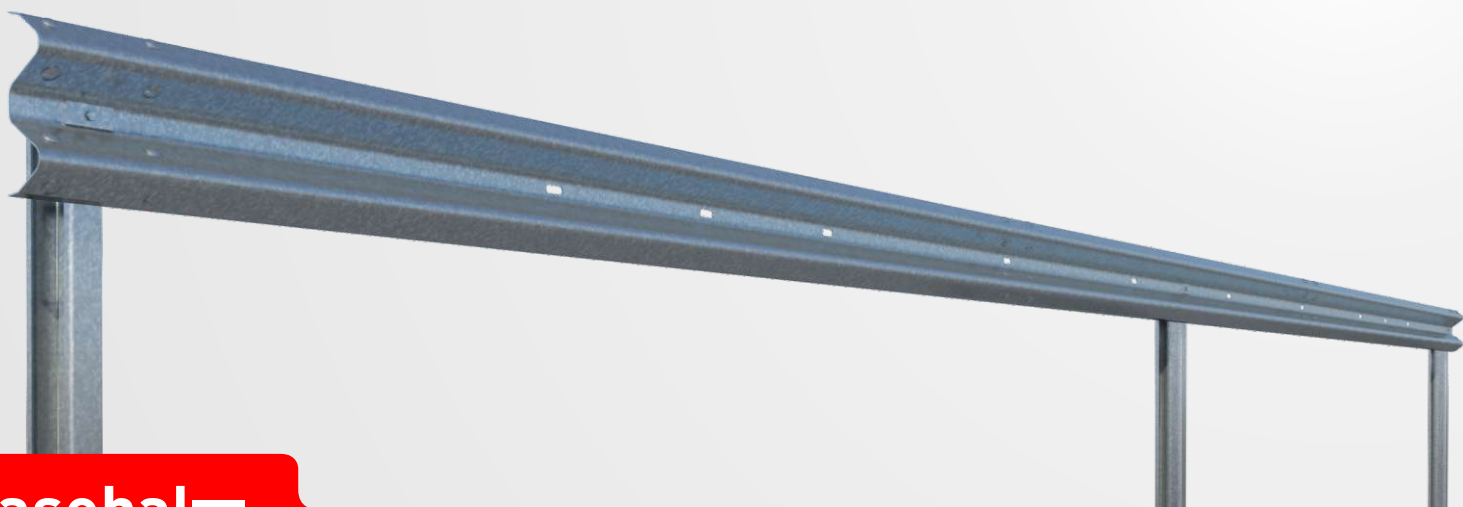

**asebal** 

Vehicle Restraint System


### Definition

Single metal barrier reduced for lateral side. System formed by a double wave barrier and C posts 6 metres apart.

### Performance parameters

Containment level	<b>N2</b>	Working Width (W)	<b>W4</b>	Impact Severity	<b>A</b>	Dynamic Deflection (D)	<b>1,2<sub>m</sub></b>
-------------------	-----------	-------------------	-----------	-----------------	----------	------------------------	------------------------

### Profile

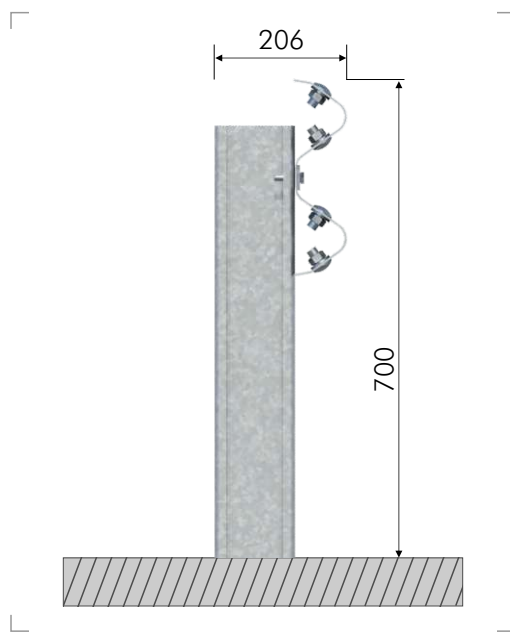



**asebal**

Vehicle Restraint System

### Components for sections of 12 m

Ítem	Parts	Uds
1	Standard barrier of 4 m (Perforated at intervals of 1,33 m, 2 mm thick)	3
2	C post-125x70x18x4 de 1,400 mm	2
3	Washer Ø17 x35x4 mm	24
4	Hexagon nut M16	24
5	Round head bolt M16x30	24
6	Hexagon head cap bolt DIN 933 M10x40 quality 8.8	2
7	Washer 40x40x5 mm Ø11 for M10	2
8	Nut DIN 934 M10 quality 8	2
9	Washer 100x40x5 with hole Ø11 for M10	2
10	Reflector	1,5

### Fasteners

