


H2 W5 A 1,5<sub>m</sub> VI5

AS-BL2.D



CE

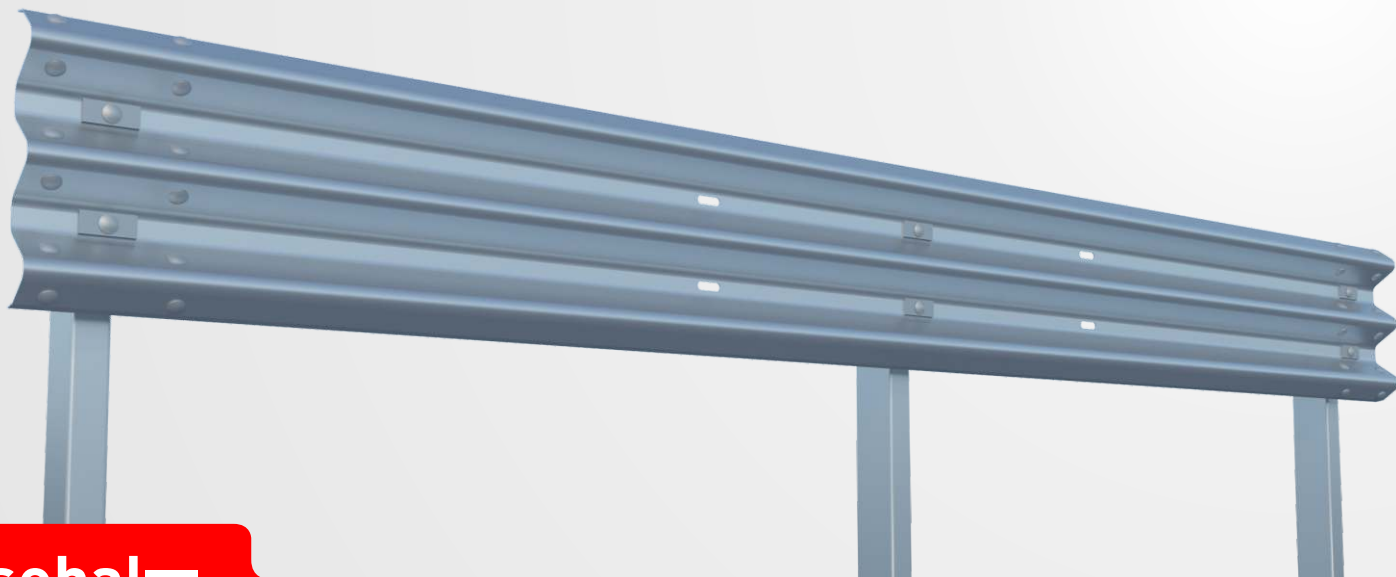

**asebal**

Vehicle Restraint System


### Definition

Single metal barrier for lateral side. System formed by a triple wave barrier, spacer and C posts 2 metres apart.

### Performance parameters

Containment level	<b>H2</b>	Working Width (W)	<b>W5</b>	Impact Severity	<b>A</b>	Dynamic Deflection (D)	<b>1,5<sub>m</sub></b>
Intrusion (I)	<b>VI5</b>						

### Profile

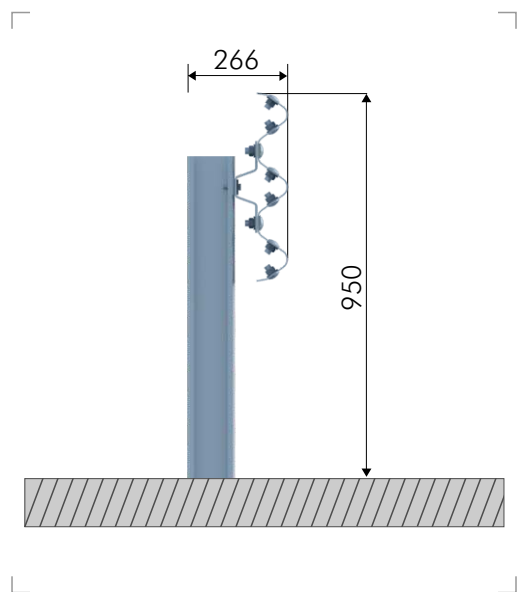



**asebal**

Vehicle Restraint System

### Components for sections of 4 m

Item	Part	Units
1	Triple wave barrier of 4,000 mm	1
2	C post 125x70mm of 1,800 mm	2
3	Trapezoidal spacer for triple wave	2
4	Round head bolt M16x40	4
5	Round head bolt M16x30	12
6	Bolt DIN 933 M10x40	2
7	Rectangular washer 100x40x5 mm	4
8	Square washer 40x40x5 mm	4
9	Washer Ø17x 35x4 mm	16
10	Nut M16	16
11	Nut M10	2
12	Reflector	1

### Fasteners

